



捷曼门业(北京)有限公司/捷曼 (天津)智能科技有限公司

地址: 北京市房山区长政南街2号双子座北楼510室

电话: 010-83318982 400-666-1770

邮箱: gemlin@126.com

网址: www.gemlin.com

抖音号: gemlin2009

厂址: 天津市武清区万兴工业区兴旺道4号
南通市苏锡通产业园黄山路22号4栋



【公司公众号】



【服务二维码】



工业提升门

Industrial Sectional Doors

捷曼门业(北京)有限公司
捷曼 (天津)智能科技有限公司

捷曼简介 >>>

Company Profile

捷曼工业用门秉承欧洲工业门的优秀品质，将其丰富经验带入中国。具有精湛的工艺、全面的安全装置、先进的设计理念、完善及时的售后服务体系，让您的使用得到长期安全可靠的保证。捷曼工业门和装卸系统自进入市场以来已经成功的应用到国内从多知名企业。

Adhering to the excellent quality of the European industrial doors, Gemlin Industrial Sectional doors bring its rich experience into China. With super technology, a full range of safety devices, advanced design concepts, complete and timely after-sales service system, Gemlin provides a safe and reliable guarantee for your long-term use of their products. Since being into the market, Gemlin products have been successfully applied to many well-known enterprises.



产品目录 >>>

Contents

工业提升门 Industrial Sectional Doors	01
□ STD40 钢质提升门 STD40 Steel Sectional Door	05
□ FVS40 铝质提升门 FVS40 Aluminum Sectional Door	07
□ STD80 冷链物流专用提升门 STD80 Special Door For Cold Chain logistics	09
□ STD-SW 实木车库门 STD-SW Wood Garage Door	10
□ STD-FB 防爆型提升门 STD-FB Explosion-proof Special Door	10
□ 主要配件及提升方式 Main Accessories and Lifting Models	11
□ 平移门 Sliding Door	13
□ 工业折叠门 Industrial Folding Door	14
□ 平开门 Flat Open Door	14
特种门 Special Doors	15
□ 柔性超大门 Flexible Ultra-door	15
□ 多段提升门 Multi Sectional Door	16
□ 卷帘门 Roller Shutter Door	16
冷库门 Cold Storage Door	17
工程业绩 Projects	18



> 专业技术支持 *Professional Technical Support*

专业的技术专家可为您的企业提供全面的工业用门及物流装卸口系统的解决方案。

Professional technical experts can provide a comprehensive industrial doors and dock systems for your business solutions.



> 高技术生产 *High-tech Production*

高新技术、先进的生产设备是确保产品质量的关键。

The high-tech, advanced production equipment to ensure product quality.



> 可靠的服务 *Reliable Service*

可靠的服务团队为您提供全天候的技术服务。

服务热线: 400-666-1702

We provide you technical services by all day. Service Hotline: 400-666-1702



> 优秀安装团队 *Excellent Installation Team*

优秀的安装团队是产品经久耐用的保证。

It guarantees that the product durable.



工业提升门 >>>

Industrial Sectional Door

捷曼工业提升门可以使用在任何工业厂房和商业建筑中，门体垂直向上开启后悬挂在屋顶下方或隐藏在门洞上方，节省了建筑物的有限空间。其优良的密封保温性、多样的外观设计是实现建筑物功能及完美外观的最佳选择。

Industrial Sectional doors can be used in any industrial plants and commercial buildings. The door opens vertically upward, then it hung below the roof or hidden in the doorway at the top, saving the limited space of the building. Its excellent sealing temperature preservation and a variety of designs are the best choice for realizing the function and perfect appearance of the building.

> STD40 钢质提升门 STD40 Steel Sectional Door

STD 分节提升门是仓储物流及工业厂房的最佳选择，具有极佳保温效果。

STD steel sectional doors are the best choice for warehousing logistics and industrial plants. It has excellent insulation effect.

> 门板 Door Panel

STD 钢质门板，内衬 PU 发泡填充物（100% 不含氟利昂）。内外表面压橘皮花纹，多种颜色可供选；门板高度 500mm-610mm，门板厚度 40mm。

STD steel door panel with PU foam filler inside (100% free of Freon), internal and external surface emboss the orange peel pattern, A variety choice of colors, door panel height of 500mm-610mm; door panel thickness 40mm.






> 门体样式 Door Types

- 附带小门 With the wicket
- 无观察窗 Nonviewing window
- 单排观察窗 Single row viewing window
- 多排观察窗 Multi-row viewing window
- 铝框观察窗 Aluminum frame viewing window
- 带门中门的单排观察窗 Single row viewing window with the safety door



尺寸范围 Size range	门宽至 9000mm Wide to 9000mm 门高至 7000mm height to 7000mm
水密性能 Water sealing property	3 级 Level 3
气密性能 Gas confined property	2 级 Level 2
导热系数 Thermal conductivity	$K=0.95W/m^2k(4x4m)$ $K=0.5W/m^2k(40mm\ door\ plank)$
隔音性能 Soundproof property	$R=22dB$
阻燃性能 Flame retardant property	门板材料为 B2 级 Door panel materials for level B2
抗风压性能 Wind pressure property	$400-700n/m^2$
门板重量 Door plank weight	$13 \sim 15kg/m^2$

> 门体色彩 Colors

		
RAL6009	RAL5010	RAL3000
		
RAL8014	RAL1021	RAL7016
		
RAL9010	RAL9002	

➤ FVS40 铝质提升门 FVS40 Aluminum Sectional Door

FVS40 分节提升门是展示厅及工业厂房的最佳选择，具有极佳保温效果。

It is the best choice for showrooms and industrial plants with an excellent perspective effect.

➤ 门板 Door Panel

FVS40 采用优质铝合金全景视窗门板，铝质窗框经阳极化处理，表面喷涂，多种颜色可供选择，视窗标配 16mm 双层聚碳酸酯玻璃或 3mm 聚碳酸酯玻璃。



FVS40 uses the high quality aluminum alloy panoramic window shutter, aluminum window frame by anodized surface coating. A variety of colors to choose from, the Window standard 16mm double-layer polycarbonate glass or 3mm polycarbonate glass.



尺寸范围 Size range	门宽至 5800mm Wide to 5800mm 门高至 7000mm height to 7000mm
水密闭性能 Water sealing property	3 级 Level 3
气密闭性能 Gas confined property	2 级 Level 2
导热系数 Thermal conductivity	$K=3.2W/m^2k(4x4m)$
隔音性能 Soundproof property	$R=19dB$
抗风压性能 Wind pressure property	$50kg/m^2$
门板重量 Door plank weight	$13 \sim 15kg/m^2$

➤ 门体样式 Door Types

全景视窗 Panoramic window 底边封闭 Bottom closure
带门中门 With the Safety Door 附带小门 With the wicket

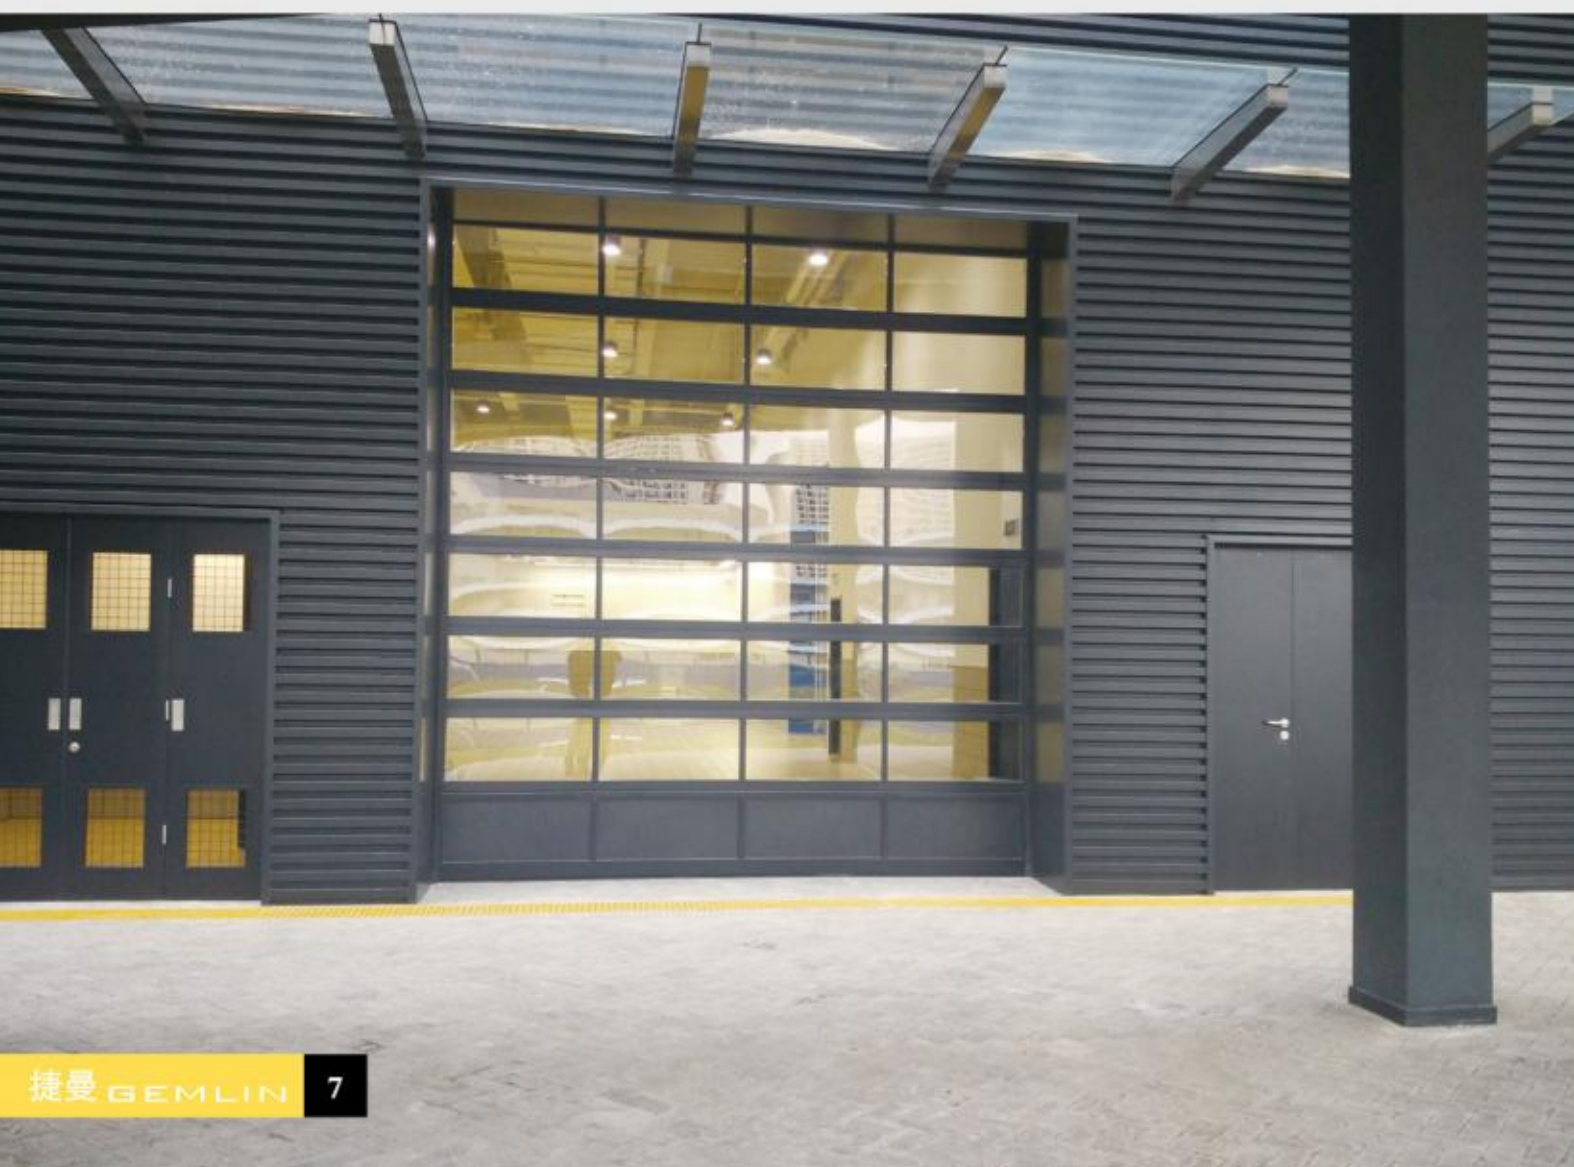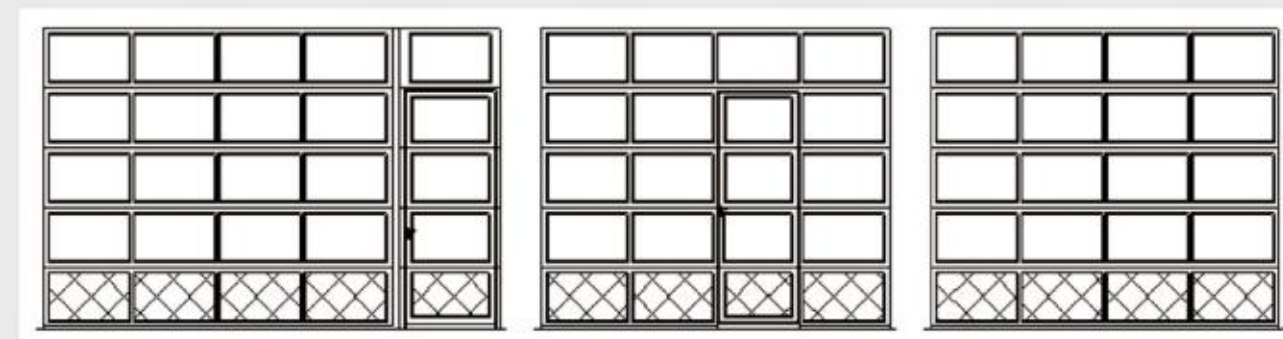



➤ **STD80 冷链物流专用提升门** **STD80 Special Door For Cold Chain Logistics**

高度保温的 STD80 提升门，特别适合各类冷藏仓库、低温食品、药品加工车间及各类有恒温需求的使用环境。

特殊的密封实现极低 U 值 $0.58W/m^2k$ 。冷或热损失降到最低，能源成本可降低 50%。由于其高稳定性，可以使用在特定强风环境，例如山区或沿海地区。

Highly insulated STD80 doors are particularly suitable for all types of refrigerated warehouses, low temperature food, pharmaceutical processing plant and all kinds of environment with constant temperature demand.

The special seal achieve very low U-value of $0.58W/m^2K$. Cold or heat loss to a minimum, energy costs can be reduced by 50%. Because of its high stability, you can use it in a particular strong wind environments, such as mountainous or coastal areas.



➤ **STD-SW 实木车库门** **STD-SW Wood Garage Door**

高标准的设计、经久耐用、安全可靠，操作简单、极佳的性价比是您的最佳选择。

High standards of design, durable, safe and reliable, simple operation, excellent economy is your best choice.

➤ **STD-FB 防爆型提升门** **Explosion-proof Special Door**

应用于电子生产、兵器设备、石化装备等易爆环境。

Used in explosive atmospheres such as electronic production, weapons equipment, petrochemical equipment, etc.



捷曼提升门每一种部件均采用先进工艺，通过标准化生产出来，已确保每一樘门都具有同一标准。
Each part of GEMLIN sectional door adopts advanced technology and produced by standardization which ensure that each door has the same standard.



安全防坠落装置
Safety falling device



底边安全保护
Edge protection



安全导轨设计
Safety rail design



门板采用防夹手设计
Door plank uses handclamping prevention design.



全新的扭簧设计
New design of the torsion spring



经久耐用的驱动系统
Durable drive system



多样的视窗 Windows
满足您不同的需求。
A variety of Windows to meet your different needs



安全的门中门
The safety door




无底槛通道门
There is no threshold access door

如果人员经常通行，您可以选择非常实用的门中门设计，GEMLIN 分节提升门配备了门中门安全互锁装置，当门中门开启时，大门不能启动。
If the staff often pass through, you can choose the safety door in door design, GEMLIN sectional door is equipped with the safety interlocking device, when the safety door opened, the sectional door can't start.



提升方式 Lifting Modes

捷曼提升门经过我们工程师严格的测量计算，保证适合的提升方式，以提高用户建筑空间的有效利用率。
Through rigorous calculation by our technician, GEMLIN ensure a suitable lifting way in order to improve the effective utilization of building space.

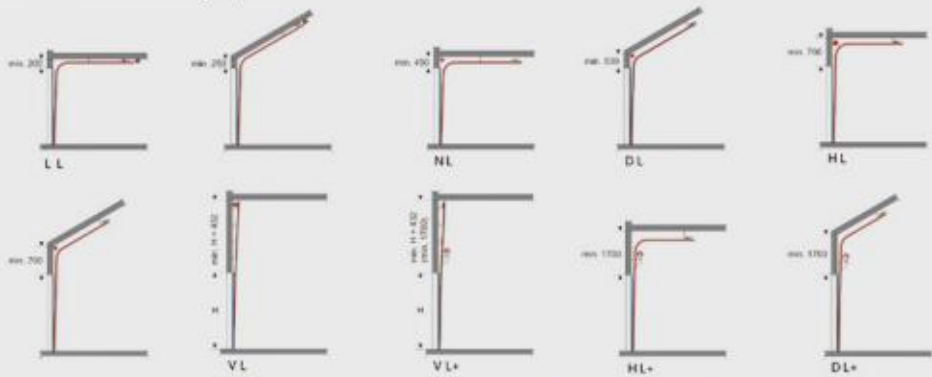

提升方式 Lifting mode	宽度 Width		高度 Height		两侧安装空间 Both sides space		电机安装空间 (中置) Motor space		电机安装空间 (侧置) Motor space		净空高度 Headroom height	进深长度 Depth length
					左	右	左	右	左	右		
垂直提升 VL	最小 min	最大 max	最小 min	最大 max	150	150	150	150	350	350	H+300	最小 min
高位提升 HL	1800	8500	1800	7000	150	150	150	150	350	350	960	H-h+300
标准提升 NL	1800	8500	1800	7000	150	150	150	150	350	350	450/530	H+530
低轨提升 LL(前置)	1800	8500	1800	7000	150	150	150	150	350	350	300	H+800
低轨提升 LL(后置)	1800	8500	1800	7000	150	150	150	150	350	350	200	H+800
斜棚提升 DL/IL	1800	8500	1800	7000	150	150	150	150	350	350	≤ 30 度	H+300

工业折叠门 Industrial Folding Door

此产品应用较为广泛，普通用于各种工业厂房。

结构简单、运行平稳，可配备不同尺寸的通行门，可选配视窗、通风窗。

产品分四页折叠多面产折叠。

This product is widely and generally used for a variety of industrial plants.

Simple structure, stable operation. It can be equipped with different sizes of access doors, viewing windows, hopper windows.

Products are divided into the four fold and multi-page fold.



平移门 Sliding door



平开门 Flat open door



大型推拉门 Sliding door



特种门 >>> Special Doors

> 柔性超大门 Flexible Ultra-Door

适用于超宽超高及其他特殊环境。


特点：使用面积大、抗风性能强、保温性能好、密封性强、稳定可靠、易操作、易维修。门体由双层聚酯纤维涂层门布组成，门布之间由铝质横梁连接。垂直升降，可选择活动导轨，多种安装方式不占室内空间。多种机械和电气保护安全保护装置。

For ultra-wide, ultra-high and other special environment.

Features: large use area, good wind resistance, good insulation properties, strong sealing, stable and reliable, easy operation, easy maintenance. The door body is composed of double-layer polyester fiber coating fabric. The fabric sections are connected by the aluminum beams. Vertical lift, you can choose the movable guide, a variety of installation methods, do not take up interior space.

A variety of mechanical and electrical protection safety device

> 安装方式 Installation

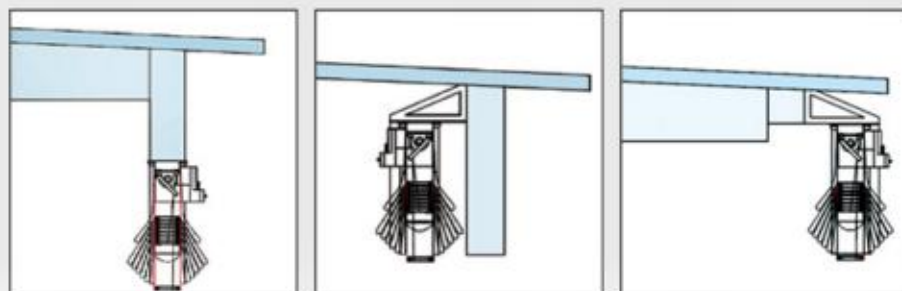

> 多段提升门 Multi-Doors

适用于门体超大，室内安装空间有限，有保温、防盗要求的工作环境。

门体有两扇或两扇以上组合而成，通过重力平衡装置，将门体平衡后由电机拖动门体运行。

Applicable to the working environment with insulation and anti-theft requirement— door body is large, indoor installation space is limited.

Door body is composed of two or more door leaves. By gravity balancing device, the door is driven by the motor.



> 卷帘门 Roller Shutter Door

GEMLIN 卷帘门广泛适用于工矿企业、物流企业、商业展览展示、家用车库等有保温密封要求的环境下使用。

GEMLIN Roller Shutter door is widely used in the environment with thermal insulation & sealing requirements, such as industrial and mining enterprises, logistics companies, business exhibition, household garage, etc.



冷库门 >>> Cold Storage Door



► 480 系列平移冷库门 480 Series Translation Cold Storage Door



► 气密提升门 Airtight Sectional Door



► 垂直提升冷库门 Vertical Lifting Cold Storage Door



► 高速冷库门 High speed cold Storage Door

案例展示 >>> Projects



► 百强家具



► 北京物美物流中心



► 北京汽车



► 北京三元双日物流中心



► 全福元



► 北京 304 场



► 东风标致销售中心



► 大河物流



► 海底捞