



捷曼门业(北京)有限公司/捷曼 (天津)智能科技有限公司

地址: 北京市房山区长政南街2号双子座北楼510室

电话: 010-83318982 400-666-1770

邮箱: gemlin@126.com

网址: www.gemlin.com

抖音号: gemlin2009

厂址: 天津市武清区万兴工业区兴旺道4号
南通市苏锡通产业园黄山路22号4栋



【公司公众号】



【服务二维码】

快速门

High Speed Doors

捷曼门业(北京)有限公司
捷曼 (天津)智能科技有限公司



Gemlin 快速门拥有完善的产品系列，能够满足您工厂的全部需要。捷曼快速门将给您带来快速、安全、高效、节能的产品。

Gemlin has a perfect fast door series, which can meet the needs of your factory—Gemlin will bring you fast, safe, efficient and energy-efficient products.




产品目录 >>>

Contents

☐ GRD100– 抗风杆快速门 Anti wind bar fast door	03
☐ GSD500– 堆积快速门 Fast pack door	04
☐ GYD800– 硬质快速门 Fast spiral door	05
☐ GM380– 组合门 Combined door	06
☐ GM200– 设备防护门 Equipment protection door	07
☐ GM300– 自修复快速门 self– repairing fast door	08
☐ GD311– 可冲洗食品级快速门 Flush food grade fast door	09
☐ GD313– 洁净室快速门 Clean room fast door	10
☐ GMFM1– 冷库快速门 Cold storage fast door	11
☐ GMFM2– 冷库快速门 Cold storage fast door	12
☐ GMFM3– 冷库快速门 Cold storage fast door	13
☐ GMFM5– 冷库快速平移门 Fast sliding door for cold storage	14
☐ VL120– 冷库快速提升门 Cold storage fast lifting door	15
☐ GFD100– 冷库对撞门 Cold storage collision door	16
☐ GFD200–PVC 自由门 PVC free door	17
☐ GFD300– 自由门 Free door	18
☐ 开启方式及颜色选择 Open styles and color selection	19
☐ 选配件 Options	20

GRD100- 抗风杆快速门 >>>

GRD100- Anti wind bar fast door

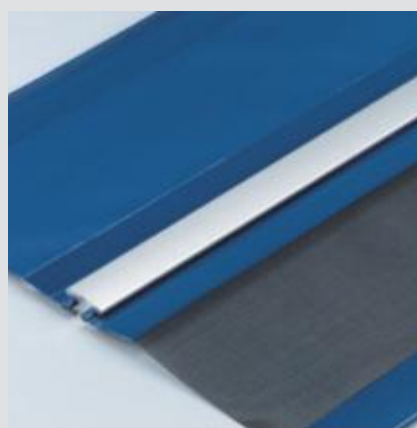

GRD100- 抗风杆快速门

GRD100- Anti wind bar fast door

GRD100 是一款非常经济实用的快速门，通过可更换的门帘结构，使您的维修成本降低。

GRD100 is a very economical and practical fast door. Replaceable door curtain structure reduce the cost of your maintenance.

门轨材质 Door Rail Material

- 钢质表面喷涂
Steel with surface painting
- 镀锌钢板 Galvanized steel plate
- 铝合金 Aluminium alloy
- 不锈钢 Stainless steel
- 铝制抗风杆 Aluminium anti-wind bar

尺寸范围 Size range	门最大宽度: 5800 Max.Width: 5800 门最大高度: 6000 Max.Height: 6000
适用范围 Scope of application	室内 Indoor
速度 Speed: Opening	开启 1.0m/s 关闭 0.8m/s 1.0m/s, Closing 0.8m/s
工作电压 Working voltage	220V/380V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area < 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area > 13 m ²)
门帘厚度 Curtain thickness	1.0mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GSD500– 堆积快速门

GSD500– Fast pack door



GSD500


GSD500 是一款用于室外恶劣条件下的大型室外快速门，该门尤其适用于超大门洞使用。这款门基本不需要保养。是使用成本最低的快速门。

GSD500 is a large outdoor fast door applicable for outdoor harsh conditions and it is especially suitable for super big doorway. This door need little maintenance with the lowest cost.

尺寸范围 Size range	门最大宽度：11000 室外 Max.Width: 11000outdoor 门最大高度：8000 室外 Max.Height:8000outdoor
适用范围 Scope of application	室外 outdoor
速度 Speed: Opening	开启 0.8m/s 关闭 0.6m/s Opening 0.8m/s, Closing 0.6m/s
工作电压 Working voltage	380V
电机功率 Motor power	1.5–3.0 Kw (根据门面积的大小) (According to the door curtain area size)
门帘厚度 Curtain thickness	1.0mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GYD800- 硬质快速门 >>>

GYD800- Fast Spiral Door

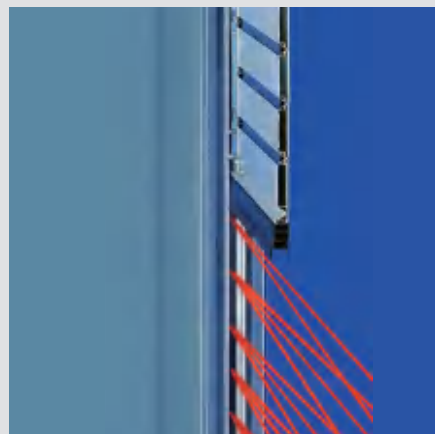

GYD800- 硬质快速门

GYD800- Fast Spiral Door

GYD800 硬质快速门是一款具有保温防盗功能的金属快速门，此款门广泛应用于地下车库出入口，生产车间出入口等进出非常频繁且有保温防盗的工作场所。

GYD800 fast spiral door is a metal fast door with thermal insulation and anti-theft function. This door is widely used in the working place with requirement of Frequent in/out, insulation and anti-theft, such as underground garage entry and exit and production workshop entrance and exit, etc.

尺寸范围 Size range	门最大宽度：6500 室外 Max.Width: 6500outdoor 门最大高度：6000 室外 Max.Height:6000outdoor
适用范围 Scope of application	室外 outdoor
速度 Speed: Opening	开启 1.0-2.5m/s Opening 1.0-2.5m/s
工作电压 Working voltage	380V
电机功率 Motor power	1.5-3.0 Kw (根据门面积的大小) (According to the door curtain area size)
门帘厚度 Curtain thickness	20-40mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GM380- 组合门 >>>

GM380-combined door



GM380- 组合门

GM380- Combined Door


日夜组合门，两门交替使用，白天工作时使用快速卷帘门，高频进出，节省时间，提高效果，夜晚或其他恶劣天气关闭提升门，安全、防盗、保温。

Day/night combination door, two doors work alternately. Fast roll door works during daytime, high frequency in and out, saving time and improving the efficiency. Turn off the sectional door at night or other bad weather, safety, burglar and heat preservation.

尺寸范围 Size range	门最大宽度：6500 室外 Max.Width: 6500outdoor 门最大高度：6500 室外 Max.Height: 6500outdoor
适用范围 Scope of application	室外 outdoor
提升门速度 Sectional door speed	开启 0.25m/s 关闭 0.25m/s opening 0.25m/s closing 0.25m/s
快速门速度 Fast door speed	开启 1.0-2.4m/s 关闭 0.8-1.2m/s opening 1.0-2.4m/s closing 0.8-1.2 m/s
工作电压 Working voltage	220V/380V
电机功率 Motor power	1.5Kw (门帘面积大于 13 m ²) Motor power: 1.5 Kw (Door curtain area >13 m ²)
门帘厚度 Curtain thickness	1.0mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GM200- 设备防护门 >>>

GM200 - Equipment protection door

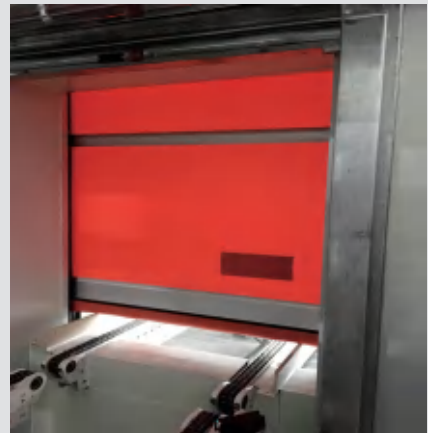

GM200 设备防护门

GM200 Equipment protection door

GM200 设备防护门，专用于自动化设备安全隔离防护、焊接工位隔离门、传送带运输物料窗口、能够保障安全，快速的物料通过，节约能源，提高效率。

GM200 equipment protection door is used for automatic equipment safety isolation protection, welding station isolation door, conveyor belt transport material window, to ensure safe and fast material passing, saving energy and improving efficiency.

适用环境: Applicated environment:

> 机器设备隔离、防护。

The isolation and protection of the machine and equipment

> 特殊环境通道防护。

Channel protection of the special environment

> 工厂快速通道

Plant rapid passage

尺寸范围 Size range	门最大宽度: 3000 室内 Max.Width:3000 Indoor 门最大高度: 3000 室内 Max.Height: 3000 Indoor
适用范围 Scope of application	室内 Indoor
速度 speed	开启 1.2-2.4m/s 关闭 1.2m/s Opening 1.2-2.4m/s closing 1.2m/s
工作电压 Working voltage	220V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area < 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area > 13 m ²)
门帘厚度 Curtain thickness	1.0mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GM300- 自修复快速门 >>>

GM300-self- repairing fast door



GM300



GM300 是一款用于频繁使用工作环境。门帘柔软而富有弹性，整个门帘没有任何负重及硬质材料，确保在紧急情况下对操作员与货物进行彻底的保护。当门受到撞击后，该门配置脱轨自动修复系统，无需任何手动复原。可使门的停工时间和维修成本降到最低。

GM300 fast door is suitable for the work environment which need frequent use. The curtain is soft and flexible and the door curtain is free of any load-bearing and rigid materials, ensuring the protection of the operator and cargo in emergency situations. When the door get impacted, the door's Automatic derailment repair system will work, do not need any manual reset, Minimizing downtime and maintenance costs for doors.

尺寸范围 Size range	门最大宽度：4000 室外 Max.Width: 4000outdoor 门最大高度：4500 室外 Max.Height: 4500outdoor
适用范围 Scope of application	室外 outdoor
速度 Speed: Opening	开启 1.5~2.0m/s 关闭 1.0m/s opening 1.5~ 2.0 m/s closing 1.0m/s
工作电压 Working voltage	220V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area < 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area > 13 m ²)
门帘厚度 Curtain thickness	1.2mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance 自修复功能 Self-repair function	选配 optional

GD311- 可冲洗食品级快速门 >>>

GD311- Flush food grade fast door

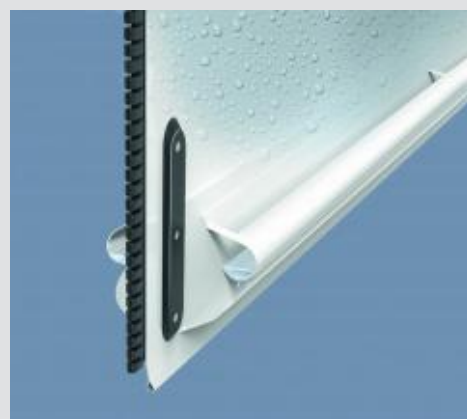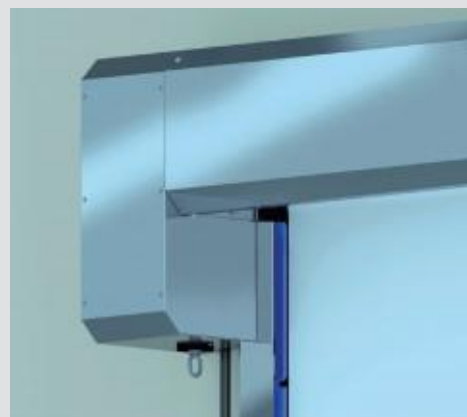

GD311- 可冲洗食品级快速门

GD311- Flush food grade fast door


GD311 是一款应用于对食品加工环境有严格要求的工作场所，极高的开启 / 关闭速度与密封性提高了物流效率，减少了空气的交互，特殊处理的门体结构，能够满足您每日清洗的环境需求。门帘柔软而富有弹性，整个门帘没有任何负重及硬质材料，确保在紧急情况下对操作员与货物进行彻底的保护。

GD311 Flush food grade fast door is applied to the workplace with strict requirement for food processing environment. High opening/closing speed and good sealing improves the logistics Efficiency and reduces the air exchange. Special treatment of the door structure can meet your daily cleaning environmental requirement. The curtain is soft and flexible and the door curtain is free of any load-bearing and rigid materials, ensuring the protection of the operator and cargo in emergency situations.

尺寸范围 Size range	门最大宽度：6500 室外 Max.Width:6500outdoor 门最大高度：6500 室外 Max.Height:6500outdoor
适用范围 Scope of application	室内 Indoor
速度 Speed: Opening	开启 2.5m/s 关闭 0.8m/s Opening 2.5m/s, Closing 0.8m/s
抗风等级 Wind resistance	3000x3000 Class 3 5000x5000 Class 2
门框 / 电机罩壳 Frame/motor cover hood	标配：不锈钢 304 Standard:Stainless Steel 304 选配：不锈钢 316 Optional:Stainless Steel 316
门帘 Curtain	标配：PVC 1300 gr/m ² 选配：1700 gr/m ² 保温 7mm,3.3W/m ² K 1700 gr/m ² Insulated 7mm,3.3W/m ² K 半透明 35/40% Translucent 35/40% FDA(白色) FDA(white) 抗静电 Antistatic

GD313- 洁净室快速门 >>>

GD313- Clean Room Fast Door

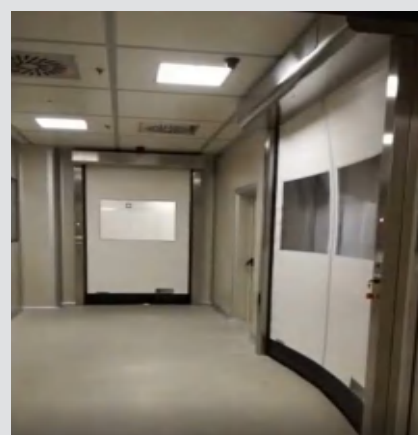

GD313- 洁净室快速门

GD313- Clean room fast door

GD313 洁净室快速门是一款专用于医疗及医药制造行业的专用快速门，此款门极高的洁净等级和密封等级，是整个行业的领导者，是行业内唯一一家有 ISO 6 级洁净等级认证、密封等级 4 级认证的快速门。专用门帘柔软而富有弹性，整个门帘没有任何负重及硬质材料，确保在紧急情况下对操作员与货物进行彻底的保护。



GD313 Clean room fast door is a special fast door for medical and pharmaceutical industry. This door had a very high clean and sealing grade. It is the leader of the whole industry. It is the only fast door in the industry that has ISO6 clean grade certification and sealing grade level 4 certification. The curtain is soft and flexible and the door curtain is free of any load-bearing and rigid materials, ensuring the protection of the operator and cargo in emergency situations.

最大门洞尺寸 Maximum dimensions	门最大宽度: 4500 室外 Max.Width: 4500outdoor 门最大高度: 4500 室外 Max.Height: 4500outdoor
适用范围 Scope of application	室内 outdoor
速度 speed	开启 2.5m/s 关闭 0.8m/s Opening 2.5m/s closing 0.8m/s
透气性 Air permeability	Class 4(UNI EN 12426)
门框 / 电机罩壳 Frame/motor cover hood	标配: 镀锌钢 Standard: Galvanized Steel
	选配: 粉末涂层钢 Optional: Powder coated steel 不锈钢 316/304 Stainless Steel 316/304
门帘 Curtain	标配: PVC 1300 gr/m ²
	选配: 1700 gr/m ² 保温 7mm, 3.3W/m ² K Optional: 半透明 35/40% Translucent 35/40% FDA (白色) FDA(white) 抗静电 Antistatic

GMFM1- 冷库快速门



GMFM1- Cold storage fast door

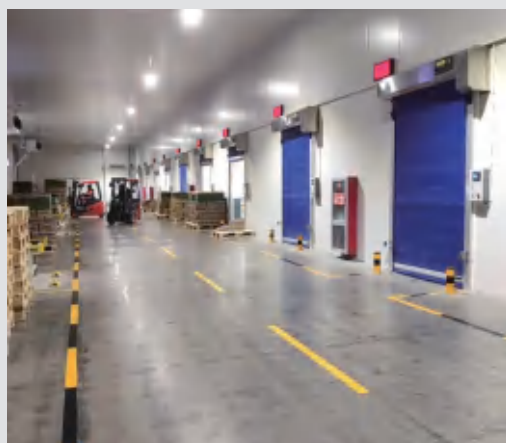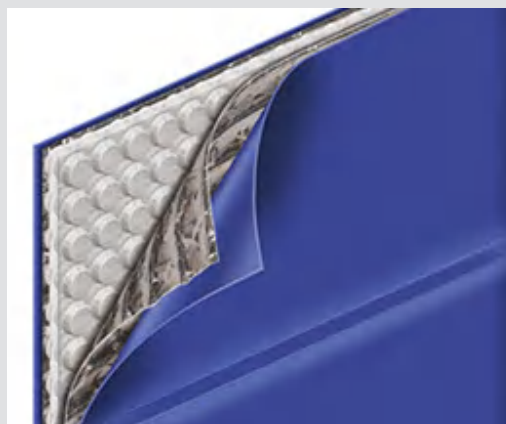

GMFM1- 冷库快速门

GMFM1- Cold storage fast door


GMFM1 应用于高频率使用的冷链物流通道。特殊设计的复合型保温门帘厚度 7mm，无断冷链门帘拼接工艺，减少冷量损失。简单便捷的结构设计几乎不需要任何维护保养。

GMFM1 is applied to the cold chain logistics channel with high frequency. Specially designed compound insulation curtain has a thickness of 7mm, without breaking cold chain curtain stitching technology, which can reduce cold loss. Simple and convenient structural design hardly requires any maintenance.

尺寸范围 Size range	门最大宽度: 5500 室内 / 室外 Max.Width: 5500 Indoor/outdoor 门最大高度: 5500 室内 / 室外 Max.Height:5500 Indoor/outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 Speed: Opening	开启 2.4m/s 关闭 1.2m/s Opening 2.4m/s Closing 1.2m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area < 13 m ²)
门帘厚度 Curtain thickness	7mm
手动装置 Manual Appliance	手动摇柄 manual handle

GMFM2- 冷库快速门

GMFM2- Cold storage fast door

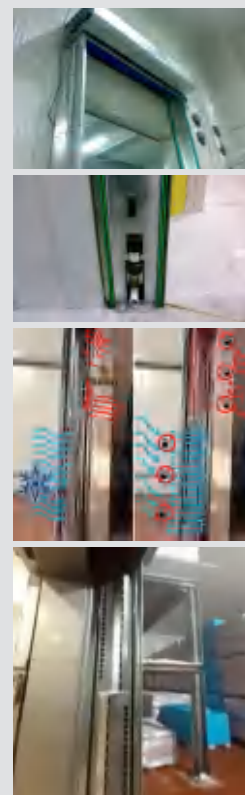

GMFM2- 冷库快速门

GMFM2- Cold storage fast door


GMFM2 是一款专门为冷库设计的高速门。极高的开启 / 关闭速度与密封性提高了物流效率。独特的开 / 关门设计缩短了开门的周期，极大地减少温湿空气的进入，从而提高了冷库的效能。

GMFM2 is a high-speed door designed for cold storage. High opening / closing speed and sealing increase the logistics efficiency. The unique opening / closing design shortens the opening period and greatly reduces the entry of warm and wet air, thus improving the efficiency of the cold storage.

最大门洞尺寸 Maximum dimensions	宽 6000mm x 高 7000mm W 6000mm x H 7000mm
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 Speed: Opening	开启 1.8–2.4m/s 可调 关闭 0.8m/s Opening 1.8–2.4m/s up to Closing 0.8m/s
抗风等级 Wind resistance	Class 2
门框 / 电机罩壳 Frame/motor cover hood	标配: 镀锌钢 Standard: Galvanized Steel 选配: 不锈钢 304/316 Optional: Stainless Steel 304/316 粉末涂层钢 Powder coated Steel
门帘 Curtain	标配 Standard: PVC 1300 gr/m ² , U=2.0W/m ² K 选配 Optional: 1700 gr/m ² 保温 Insulated 7mm, 1.3W/m ² K (如有较大热差异) (for high positive thermic differences)
加热装置 Kit riscaldamentoo	A: 电气元件和机械部件加热, 加热电缆 30W ml A: Heater on electrical components and mechanical, heating cable 30W per linear meter B: 带有暖风机的空气加热器, 最高功率 2.35KW B: Heater in air space with warm air blower 2.35KW max

GMFM3 – 冷库快速门

GMFM3 – High speed door for cold storage

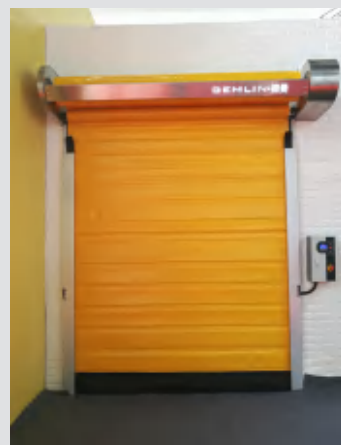

GMFM3– 冷库快速门

GMFM3– High Speed door for cold storage

GMFM3 高速冷库门是当今世界上最实用的冷库用快速门，其铝合金门边轨道技术配合密封条以实现高密封性，减少对热量的损失而达到最大节能，杜绝了空气的流入和流出。GMFM3 结构设计简单可靠，减少日后使用产生的昂贵的维修维护成本。

GMFM3 high speed cold storage door is the most practical fast cold storage door in the world today. The aluminum alloy door track technology, combined with the sealing strip. It can achieve high sealing performance, reduce the loss of heat and achieve the maximum energy saving, and eliminate the inflow and outflow of air. GMFM3 structural design is simple and reliable, reducing costly maintenance costs associated with future use.

尺寸范围 Size range	门最大宽度：4500 室内 / 室外 Max.Width: 4500 Indoor/outdoor 门最大高度：6500 室内 / 室外 Max.Height: 6500 Indoor/outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 speed	开启 2.5m/s, 关闭 1.2m/s Opening 2.5m/s, Closing 1.2m/s
工作电压 Working voltage	380V
门帘厚度 Curtain thickness	25mm
工作温度 Working temperature	-35℃ ~30℃

GMFM5- 冷库快速平移门

GMFM5- Fast sliding door for cold storage



GMFM5- 冷库快速平移门

GMFM5- Fast sliding door for cold storage

GMFM5 是一款专为冷库设计的快速冷库门，独特的保温性能，特别适应于高循环应用场所，有效的提供能源利用率，降低能源成本。热塑性外壳确保卓越的抗冲击性、耐久性和最少的停机时间，固定热塑外壳提供密封，确保即使是在温度极低的冷库中，所有的边缘密封都不会漏水。

GMFM5 is a fast freezer door designed for cold storage. Its unique insulation performance is especially suitable for high cycle applications, which can effectively provide energy utilization and reduce energy costs. The thermoplastic enclosure ensures excellent impact resistance, durability and minimal downtime. The fixed thermoplastic shell provides sealing to ensure that all edge seals will not leak even in a very low temperature cold store.

尺寸范围 Size range	单滑：门最大宽度：3000 Single slip Max width: 3000 门最大高度：5000 Max height: 5000
	双分：门最大宽度：4500 double parting Max width: 4500 门最大高度：5000 Max height: 5000
适用范围 Scope of application	室内 Indoor
速度 Speed: Opening	开启 3.15m/s opening 3.15m/s
工作电压 Working voltage	220V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area < 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area > 13 m ²)
门板颜色 Panel color	白色，蓝色 white, blue
工作温度 Working temperature	-35℃ ~30℃

VL120- 冷库快速提升门



VL120- Cold Storage Fast Lifting Door



VL120- 冷库快速提升门

VL120- Cold storage fast lifting door

VL120 是一款专门为自动化冷库设计的快速冷库门。适用频繁的冷库物流通道。独特的开 / 关门设计缩短了开门的周期，极大地减少温湿空气的进入,从而提高了冷库的效能，降低了能源成本。

VL120 is a fast door designed for automatic cold storage, suitable for frequent cold storage logistics channels. The unique opening/closing design shortens the opening cycle and greatly reduce the entry of warm and wet air, thus improving the efficiency of the cold storage and reducing the energy cost.

尺寸范围 Size range	门最大宽度：3000 室外 Max.Width: 3000outdoor 门最大高度：4500 室外 Max.Height:4500outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 speed	开启 1.5m/s 关闭 0.8m/s opening1.5m/s closing0.8m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5 Kw
门体厚度 Door body thickness	120mm
工作温度 Working temperature	-35℃ ~ 55℃
手动装置 Manual Appliance	选配 optional

GFD100- 冷库对撞门 >>>

GFD100- Cold Storage Collision Door



GFD100- 冷库对撞门

GFD100- Cold Storage Collision Door

用于进出频繁的冷库经营场所，通过车辆撞击开启，实现门的开启，特殊的铰链设计使门自动关闭，此款门能够有效的减少了冷气外泄，实现节约能源，降低能源费用的支出。可使门的停工时间和维修成本降到最低。

It is used for cold storage with frequent entry and exit. The door is opened by a vehicle impact and it closes automatically through the special zipper design. This Door can effectively reduce the leakage of cold air, realizing the energy conservation and reducing the energy cost. It can help to reduce the shut down time and maintenance cost to the minimum.

尺寸范围 Size range	门最大宽度：3000 室内 Max.Width: 3000 Indoor 门最大高度：3500 室内 Max.Height:3500 Indoor
适用范围 Scope of application	室内 Indoor
门体厚度 Door body thickness	48mm
视窗 Window	标准 standard
工作电压 Working voltage	220V (加热门框) 220V(Heating door frame)
门板颜色 Panel color	红色 red
工作温度 Working temperature	-25℃ ~ 5℃

GFD200-PVC 自由门 >>>

GFD200-PVC Free Door



GFD200-PVC 自由门 GFD200-PVC Free door


用于进出频繁的食品加工、冷库经营场所，通过车辆撞击开启，实现门的开启，特殊的铰链设计使门自动关闭，此款门能够有效的减少了冷气外泄，实现节约能源，降低能源费用的支出。

It is used for cold storage and food processing plant with frequent entry and exit. The door is opened by a vehicle impact and it closes automatically through the special zipper design. This Door can effectively reduce the leakage of cold air, realizing the energy conservation and reducing the energy cost.

尺寸范围 Size range	门最大宽度：3000 室内 Max.Width: 3000 Indoor 门最大高度：3500 室内 Max.Height:3500 Indoor
适用范围 Scope of application	室内 Indoor
视窗 Window	标准 standard
工作电压 Working voltage	220V (冷库环境使用加热门框) (Heating door frame for cold storage environment)
门板颜色 Door panel color	全透明、双色 transparent, two color
工作温度 Working temperature	-25℃ ~ 5℃

GFD300- 自由门 >>>

GFD300-Free Door

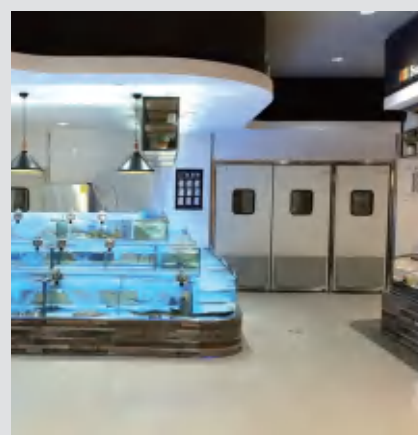

GFD300 自由门

GFD300 Free Door

用于进出频繁的食品加工经营场所，通过车辆撞击开启，实现门的开启，特殊的铰链设计使门自动关闭，此款门能够有效的减少了冷气外泄，实现节约能源，降低能源费用的支出。

It is used for food processing plant with frequent entry and exit. The door is opened by a vehicle impact and it closes automatically through the special zipper design. This Door can effectively reduce the leakage of cold air, realizing the energy conservation and reducing the energy cost.

尺寸范围 Size range	门最大宽度：3000 室内 Max.Width: 3000 Indoor 门最大高度：3000 室内 Max.Height:3000 Indoor
适用范围 Scope of application	室内 Indoor
视窗 Window	标准 standard
门板材质 Door panel material	ABS、304 不锈钢、铝合金 ABS、304stainless steel、aluminium alloy


开启方式及颜色选择




Open style and color selection




按键开启
Press switch open



拉线开启
Pull rope open

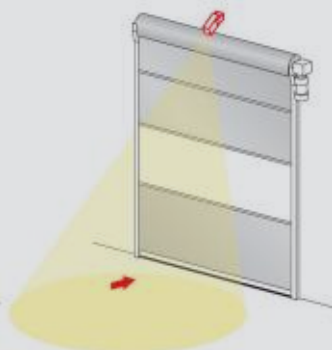


雷达开启
Radar open

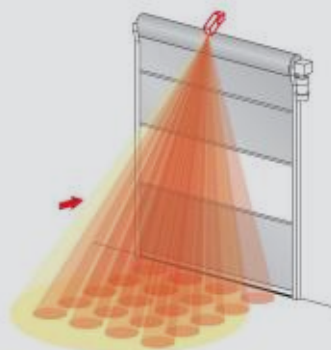

光波开启
Light wave open




地磁开启
Geomagnetic open



遥控开启
Remote control open



光电开启
Photocell open



光栅开启
Grating open

颜色选择 Color Options



RAL1003



RAL2004



RAL3000



RAL5002



RAL6005



RAL7035



RAL9010



RAL9005

选配件

Options




单键开启按钮
One-touch
start button



光电开关
Photoelectric switch



雷达
radar



三键开启按钮
Three-button
start button



光电开关保护罩
Photoelectric
Switch Guard



光波开启 (6m)
Lightwave Open



带锁启按钮
Kai locking button



拉线开关
Pull switch



单键开启按钮
One-touch start butto



电源锁
Power locks




拉绳开关支架
Rope switch bracket



地磁感应开关
Geomagnetic Sensor Switch



遥控器
remote control



防撞护角
Crash Corner



警示灯
Warning Light



防撞柱
Crash column



光栅保护装置
Grating protection device



交通灯
traffic light