

安全 · 耐用 · 经济
SECURITY · DURABLE · ECONOMIC



Gemlin Door (Beijing) Co., Ltd 捷曼门业 (北京) 有限公司

Address: Gemini 2 building, Changyang metro station, Beijing,
Fangshan District
http:www.gemlin.com
E-mail: gemlin@126.com
Tel: 010-83318982 / 83319829
Fax: 86-10-83316857
Service Hotline: 400-666-1702

Tianjin Branch: No. 4, Xingwang Road, Wanxing industrial park,
Wuqing district, Tianjin (Tianjin Factory)
Tel: 022-26929258 / 26929256
Fax: 022-26929258

Wuxi Branch: The New District of Wuxi City Industrial Park No. 79 tin
Chunyang road -15

Shenyang Branch: 601 Jiahe Building, Pangjiang Street, Dadong
District, Shenyang City
Tel: 86-24-24831277
Fax: 86-24-24831277

地址: 北京市房山区长阳地铁站双子座2号楼

网址: www.gemlin.com

邮箱: gemlin@126.com

电话: 010-83318982 / 83319829

传真: 010-83316857

服务热线: 400-666-1702

天津分公司: 天津市武清区万兴工业园兴旺道4号

电话: 022-26929258 / 26929256

传真: 022-26929258-813

无锡分公司: 无锡市新区锡贤路春阳工业园79号-15

沈阳分公司: 沈阳市大东区滂江街68号嘉禾大厦601


电话: 86-24-24831277

传真: 86-24-24831277

冷库门 Cold-storage Doors

卓越品质的代表 THE EUROPEAN EXCELLENT QUALITY REPRESENTATIVE

 捷曼
GEMLIN

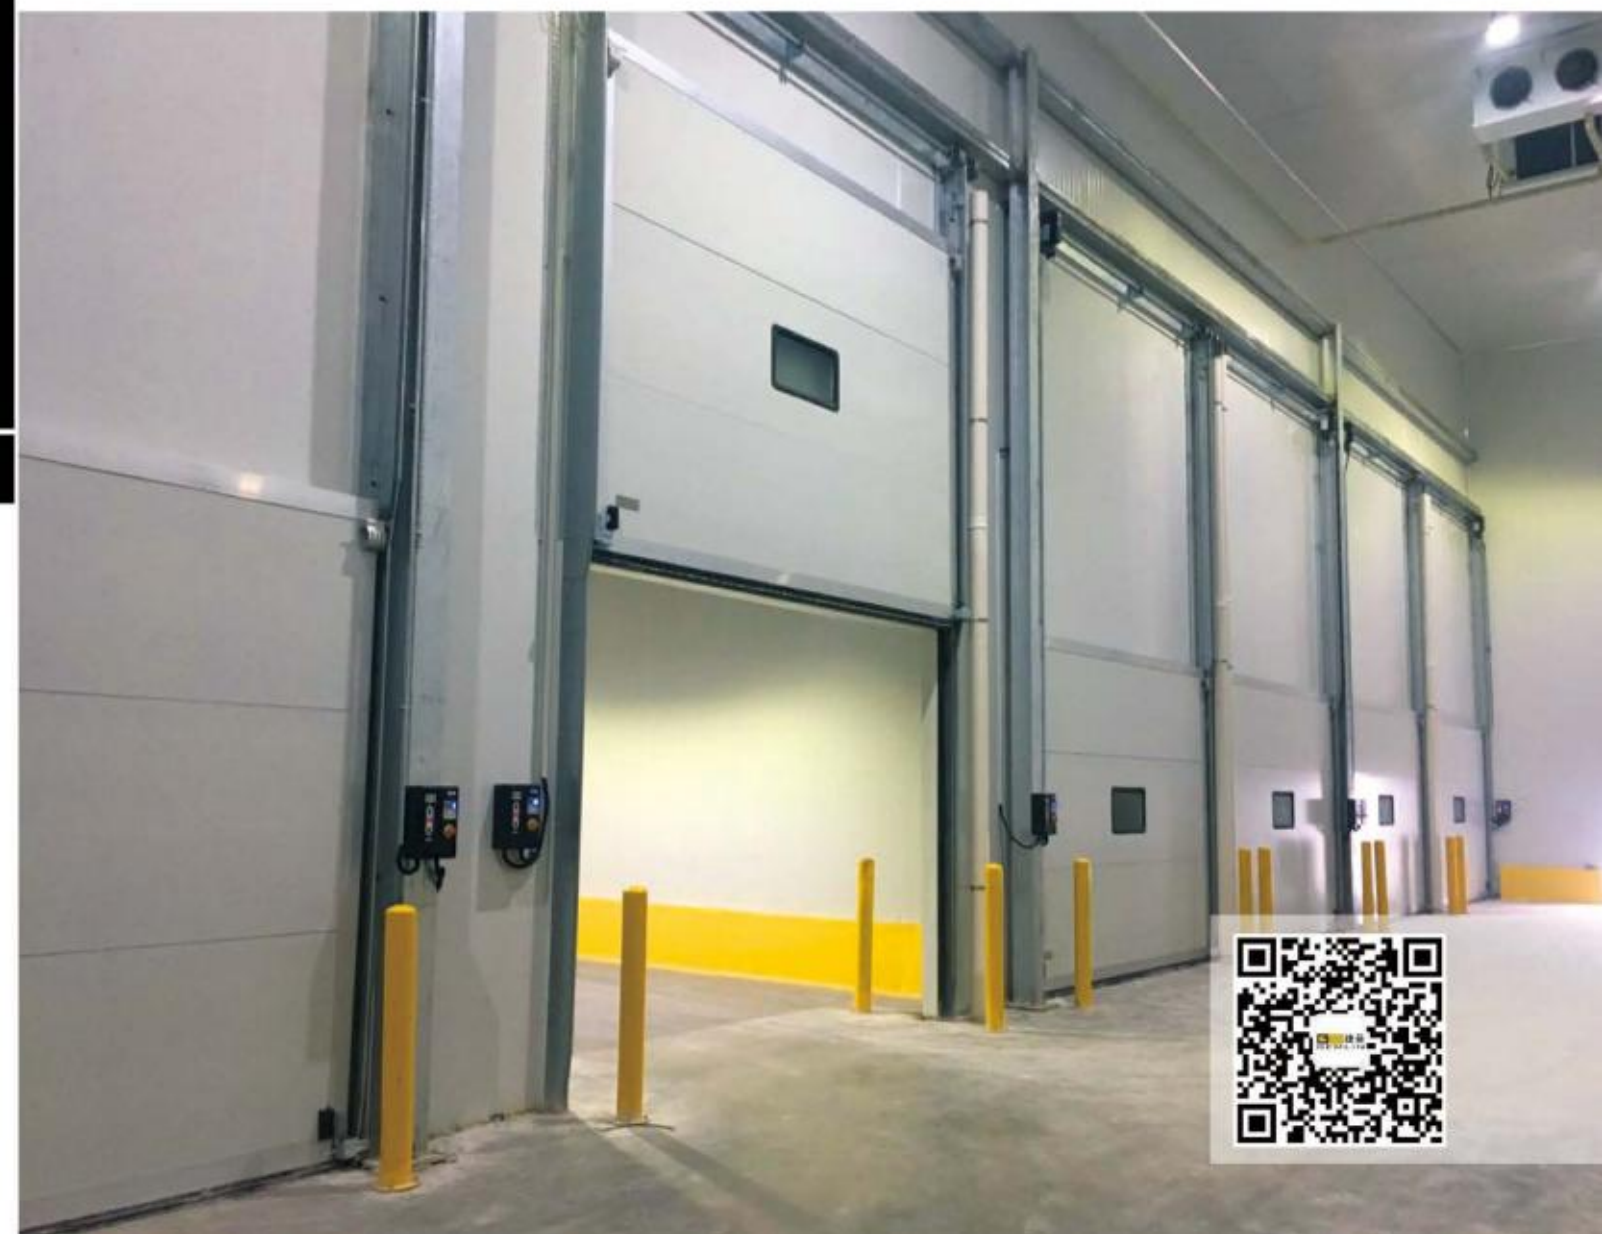



冷库及食品加工专用门

Special doors for cold storage and food processing

捷曼冷库门系列产品采用欧洲产品质量标准，重要部件全部采用进口配件，产品多样，根据不同的工况环境提供多样的的产品组合。

Gemlin coldstore door series products adopt European quality standards, all important parts adopt imported accessories, and we provide a variety of product combination according to different working conditions.



产品目录 >>> Contents

☐ GOD480 平移冷库门 GOD480 Sliding door	3
☐ GOD500 平开冷库门 GOD500 Double Leaf Hinged door	4
☐ STD80 冷链物流专用提升门 STD80 Special Sectional Door For Cold Chain Logistics	5
☐ STD100 分节快速提升冷库门 STD100 High-speed sectional door for cold storage	6
☐ STD60 气密提升门 Gastight sectional door	7
☐ GMF120 垂直提升冷库门 Vertical lift door for cold storage	8
☐ GMFM1 冷库快速门 High speed door for cold storage	9
☐ GMFM2 冷库快速门 High speed door for cold storage	10
☐ GMFM3 冷库快速门 High speed door for cold storage	11
☐ GMFM5 冷库快速平移门 Fast Sliding door for cold storage	12
☐ GFD100 冷库对撞门 Traffic door	13
☐ GFD200 PVC 自由门 PVC Traffic door	14
☐ GCD100 气门帘 Air Curtain	15
☐ GCD200 空气门 Air Door	16
☐ GRD100 抗风杆快速门 Fast roll door	17
☐ GM300 自修复快速门 Self-repairing fast door	18
☐ GOD40 洁净平开门 Clean Swing Doors	19
☐ 柔性隔断 Separation Flex doors	20

GOD480 平移冷库门


GOD480 Sliding door



- STANDARD** 标准: PE 涂层
Plastified sheet
- OPTIONAL** 选配: 304 不锈钢钢板
Stainless steel sheet

型号 type	门板厚度 panel thickness
GOD480-TP	92~150mm
GOD480-TPX	92~150mm

- A. 意大利设计铰接高强度铝合金框架结构, 密封连接部位断冷桥处理。
Hinged door with high-strength aluminum alloy frame structure designed in Italy, sealed joints with broken bridge treatment.
- B. 门扇内部填充聚氨酯绝缘材料, 发泡密度 42 kg /m³。
The Door panel is filled with polyurethane insulation material, the foaming density 42 kg /m³.
- C. 浮开沉闭滑动轨道设计, 防撞磨损密封条。
The track design with a patented sliding system, anti-collision sealing gasket.
- D. 进口密封条, 确保密封条与门板之间密封。
Import sealing gaskets to ensure the sealing between the seal strip and door plate.
- E. 标准配置, 加热门框, 电动自我调节加热, 工作电压 36/220 伏。
Standard configuration, heat door frame, electric self-regulating heating, working voltage 36 / 220 volts.
- F. 紧急自动释放机制。
Automatic emergency release mechanism.
- G. 面板材质材质及颜色选择: 彩色钢板、不锈钢钢板、ABS 复合板。
Panel material and color selection: color plate, stainless steel plate, ABS composite plate.

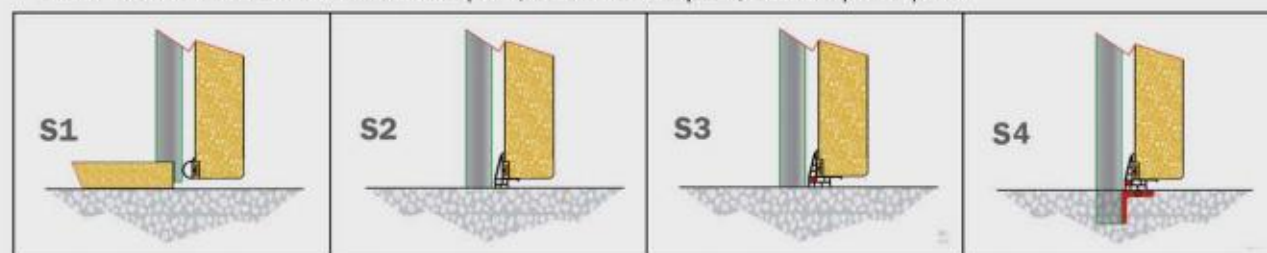

GOD500 平开冷库门

GOD500 Double Leaf Hinged door



- STANDARD** 标准: PE 涂层
Plastified sheet
- OPTIONAL** 选配: 304 不锈钢钢板
Stainless steel sheet



型号 type	门板厚度 panel thickness
GOD500 - TP	92~150mm
GOD500 - TPX	92~150mm


- A. 意大利设计铰接高强度铝合金框架结构, 密封连接部位断冷桥处理。
Hinged door with high-strength aluminum alloy frame structure designed in Italy, sealed joints with broken bridge treatment.
- B. 门扇内部填充聚氨酯绝缘材料, 发泡密度 42 kg /m³。
The Door panel is filled with polyurethane insulation material, the foaming density 42 kg /m³.
- C. 浮开沉闭滑动轨道设计, 防撞磨损密封条。
The track design with a patented sliding system, anti-collision sealing gasket.
- D. 进口密封条, 确保密封条与门板之间密封。
Import sealing gaskets to ensure the sealing between the seal strip and door plate.
- E. 标准配置, 加热门框, 电动自我调节加热, 工作电压 36/220 伏。
Standard configuration, heat door frame, electric self-regulating heating, working voltage 36 / 220 volts.
- F. 紧急自动释放机制。
Automatic emergency release mechanism.
- G. 面板材质材质及颜色选择: 彩色钢板、不锈钢钢板、ABS 复合板。
Panel material and color selection: color plate, stainless steel plate, ABS composite plate.

STD80 冷链物流专用提升门 STD80 Special Sectional Door For Cold Chain Logistics



高度保温的 STD80 提升门，特别适合各类冷藏仓库、低温食品、药品加工车间及各类有恒温需求的使用环境。特殊的密封实现极低 U 值 0.58W/m²k。冷或热损失降到最低，能源成本可降低 50%。由于其高稳定性，可以使用在特定强风环境，例如山区或沿海地区。

Highly insulated STD80 sectional doors are particularly suitable for all types of refrigerated warehouses, low temperature food, pharmaceutical processing plant and all kinds of environment with constant temperature demand. The special seal achieve very low U-value of 0.58W/m²K. Cold or heat loss to a minimum, energy costs can be reduced by 50%. Because of its high stability, you can use it in a particular strong wind environments, such as mountainous or coastal areas.

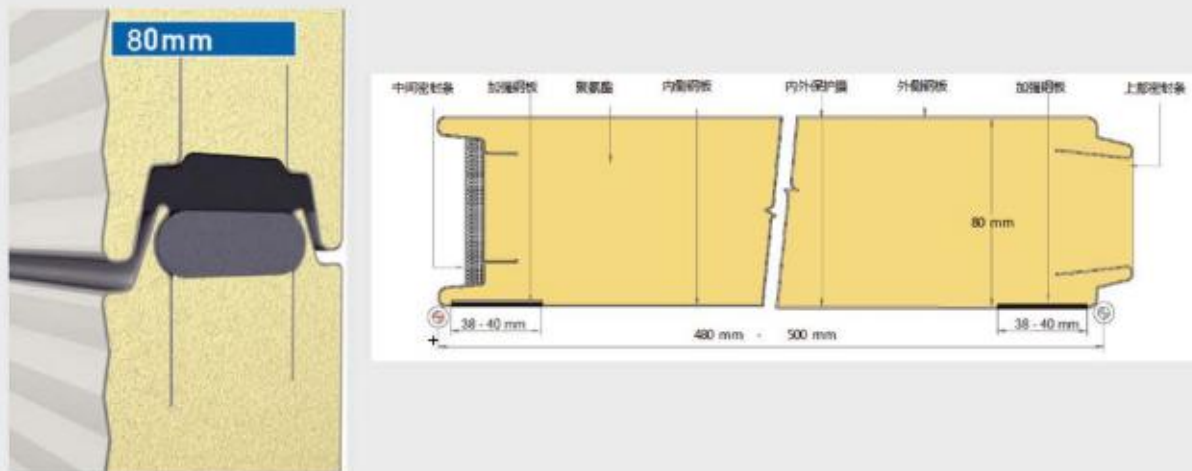

STD100 分节快速提升冷库门 STD100 High-speed sectional door for cold storage



STD100 分节快速冷库门专业用于高频率进出货物的冷库工作场所，100mm 的断冷桥门板，可有效隔绝库内外温度。

STD100 High-Speed sectional door is used for cold storage workplaces with high frequent entrance and exit. The 100mm cold-breaking bridge door panel can effectively isolate the temperature inside and outside the warehouse.

尺寸范围 size range	Outer Refrigerator 外侧（冷藏库）	Innter Refrigerator 内侧（冷藏库）
最大门宽（LDB）Max.Door Width	5000 mm	4000 mm
最大门高（LDH）Max.Door Height	5000 mm	4000 mm
速度 Speed		
最大开门速度 Max.Opening speed	2.1m/s	
最大关门速度 Max.Closing speed	0.6m/s	
门板 Door panel		
内部填充 PU 发泡材料 Foamed with PU		
厚度 Thickness	80/100mm	
紧急开启 Emergency opening		
配重 Counter weight		
手动倒链 Emergency Hand Chain（选配 /Optional）		
保温性（EN 12424）Thermal Insulation(EN 12424)		
面积 25m ² 的门 The door area 25m ²	U _T = 0.3W/(m ² · K)	
轨道类型 Track type		
VL 轨：冷冻库内侧或外侧均可安装		
VL Track:The inside and outside of the freezer can be installed.		
HL 轨：只能装在冷冻库外侧		
HL Track:It can only be installed outside of the freezer.		

STD60 气密提升门

STD60 Gastight sectional door




STD60- 气密提升门
STD60-Gastight sectional door

气密提升门是用于气体催熟加工间的专业用门。气密提升门能够提供各种厚度及面板颜色，内部填充环保聚氨酯。门板间特殊的断冷桥隔热处理，门四周特殊的三重密封胶条，关门向内推挤动作，确保正门的密封性能。

Gastight sectional door is a professional door for gas ripening processing chambers. The panels of the gastight sectional door can be offered in different thickness & colors and the interior is filled with environmentally polyurethane foam. The sophisticated panel connections with special sealing, in combination with the 3-flap gaskets around the door perimeter, ensure optimum gas tightness.

适用范围 Scope of application	室内 Indoor
速度 speed	开启 0.3m/s opening 0.3m/s
工作电压 Working voltage	220V/380V
电机功率 Motor power	0.75 Kw
门体厚度 Door body thickness	60 mm
工作温度 Working temperature	常温 / normal temperatures

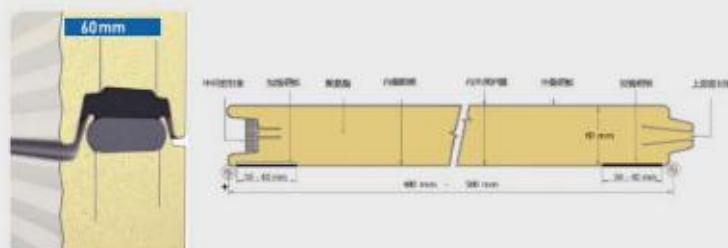

GMF120 垂直提升冷库门

GMF120 Vertical lift door for cold storage



GMF120- 冷库快速提升门
GMF120-Vertical lift door for cold storage

GMF120 是一款专门为自动化冷库设计的快速冷库门。适用频繁的冷库物流通道。独特的开 / 关门设计缩短了开门的周期，极大地减少温湿空气的进入，从而提高了冷库的效能，降低了能源成本。

GMF120 is a fast door designed for automatic cold storage, suitable for frequent cold storage logistics channels. The unique opening/closing design shortens the opening cycle and greatly reduce the entry of warm and wet air, thus improving the efficiency of the cold storage and reducing the energy cost.

尺寸范围 Size range	门最大宽度: 3000 室外 Max.Width: 3000outdoor 门最大高度: 4500 室外 Max.Height: 4500outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 speed	开启 1.5m/s 关闭 0.8m/s opening 1.5m/s closing 0.8m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5 Kw
门体厚度 Door body thickness	80-121mm
工作温度 Working temperature	-35℃ ~ 5℃
手动装置 Manual Appliance	选配 optional

GMFM1- 冷库快速门

GMFM1 – High speed door for cold storage



GMFM1- 冷库快速门

GMFM1- High speed door for cold storage

GMFM1 应用于高频率使用的冷链物流通道。特殊设计的复合型保温门帘厚度10mm，无断冷链门帘拼接工艺，减少冷量损失。简单便捷的结构设计几乎不需要任何维护保养。

GMFM1 is applied to the cold chain logistics channel with high frequency. Specially designed compound insulation curtain has a thickness of 10mm, without breaking cold chain curtain stitching technology, which can reduce cold loss. Simple and convenient structural design hardly requires any maintenance.

尺寸范围 Size range	门最大宽度: 3500 室内 Max.Width: 3500 Indoor 门最大高度: 5500 室内 Max.Height: 5500 Indoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 Speed: Opening	开启 1.8m/s 关闭 1.2m/s Opening1.8m/s Closing1.2m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area< 13 m ²)
门帘厚度 Curtain thickness	10mm
工作温度 Working temperature	0℃ ~30℃

GMFM2- 冷库快速门

GMFM2 – High speed door for cold storage



GMFM2- 冷库快速门

GMFM2- High speed door for cold storage

GMFM2 是一款专门为冷库设计的高速门。极高的开启 / 关闭速度与密封性提高了物流效率。独特的开 / 关门设计缩短了开门的周期，极大地减少温湿空气的进入，从而提高了冷库的效能。

GMFM2 is a high-speed door designed for cold storage. High opening / closing speed and sealing increase the logistics efficiency. The unique opening / closing design shortens the opening period and greatly reduces the entry of warm and wet air, thus improving the efficiency of the cold storage.

尺寸范围 Size range	门最大宽度: 4000 室内 / 室外 Max.Width: 4000 Indoor/outdoor 门最大高度: 4000 室内 / 室外 Max.Height:4000 Indoor/outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 Speed: Opening	开启 2.4m/s 关闭 1.2m/s Opening2.4m/s Closing1.2m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area< 13 m ²)
门帘厚度 Curtain thickness	20mm
工作温度 Working temperature	-35℃ ~30℃

GMFM3 – 冷库快速门

GMFM3 – High speed door for cold storage



GMFM3– 冷库快速门

GMFM3– High Speed door for cold storage

GMFM3 高速冷库门是当今世界上最实用的冷库用快速门，其铝合金门边轨道技术配合密封条以实现高密封性，减少对热量的损失而达到最大节能，杜绝了空气的流入和流出。GMFM3 结构设计简单可靠，减少日后使用产生的昂贵的维修维护成本。

GMFM3 high speed cold storage door is the most practical fast cold storage door in the world today. The aluminum alloy door track technology, combined with the sealing strip, it can achieve high sealing performance, reduce the loss of heat and achieve the maximum energy saving, and eliminate the inflow and outflow of air. GMFM3 structural design is simple and reliable, reducing costly maintenance costs associated with future use.

尺寸范围 Size range	门最大宽度: 4500 室内 / 室外 Max.Width: 4500 Indoor/outdoor 门最大高度: 4500 室内 / 室外 Max.Height: 4500 Indoor/outdoor
适用范围 Scope of application	室内 / 室外 Indoor/outdoor
速度 speed	开启 2.5m/s, 关闭 1.2m/s Opening 2.5m/s, Closing 1.2m/s
工作电压 Working voltage	380V
门帘厚度 Curtain thickness	25mm
工作温度 Working temperature	-35℃ ~30℃

GMFM5– 冷库快速平移门

GMFM5– Fast Sliding door for cold storage



GMFM5– 冷库快速平移门

GMFM5– Fast sliding door for cold storage

GMFM5 是一款专为冷库设计的快速冷库门，独特的保温性能，特别适应于高频率进出的场所，有效的提供能源利用率，降低能源成本。热塑性外壳确保卓越的抗冲击性、耐久性和最少的停机时间，固定热塑外壳提供密封，确保即使是在温度极低的冷库中，所有的边缘密封都不会漏水。

The GMFM5 is a fast door specially designed for refrigerator. Unique insulation performance, especially adapted to high-cycle applications, effectively improve the energy efficiency and reduce energy costs. The thermoplastic housing ensures excellent impact resistance, durability and minimal downtime, and the fixed thermoplastic housing provides a good seal that ensures that all edge seals will not leak even in extremely low temperature refrigerators.

尺寸范围 Size range	单滑: 门最大宽度: 3000 Single slip Max width: 3000 门最大高度: 5000 Max height: 5000 双分: 门最大宽度: 4500 double parting Max width: 4500 门最大高度: 5000 Max height: 5000
适用范围 Scope of application	室内 Indoor
速度 Speed: Opening	开启 3.15m/s opening 3.15m/s
工作电压 Working voltage	220V
电机功率 Motor power	1.5 Kw
门板颜色 Panel color	白色, 蓝色 white, blue
工作温度 Working temperature	-35℃ ~30℃

GFD100- 冷库对撞门 >>>

GFD100- Traffic Door



GFD100- 冷库对撞门
GFD100- Traffic Door

用于进出频繁的冷库经营场所，通过车辆撞击开启，实现门的开启，特殊的铰链设计使门自动关闭，此款门能够有效的减少了冷气外泄，实现节约能源，降低能源费用的支出。可使门的停工时间和维修成本降到最低。

It is used for cold storage with frequent entry and exit. The door is opened by a vehicle impact and it closes automatically through the special hinge design. This Door can effectively reduce the leakage of cold air, realizing the energy conservation and reducing the energy cost. It can help to reduce the shut down time and maintenance cost to the minimum.

尺寸范围 Size range	门最大宽度: 3000 室内 Max.Width: 3000 Indoor 门最大高度: 3500 室内 Max.Height:3500 Indoor
适用范围 Scope of application	室内 Indoor
门体厚度 Door body thickness	48mm
视窗 Window	标准 standard
工作电压 Working voltage	220V (加热门框) 220V(Heating door frame)
门板颜色 Panel color	红色 red
工作温度 Working temperature	-25℃ ~ 5℃

GFD200-PVC 自由门 >>>

GFD200-PVC Traffic door



GFD200-PVC 自由门
GFD200-PVC Traffic door


用于进出频繁的食品加工、冷库经营场所，通过车辆撞击开启，实现门的开启，特殊的铰链设计使门自动关闭，此款门能够有效的减少了冷气外泄，实现节约能源，降低能源费用的支出。

It is used for cold storage and food processing plant with frequent entry and exit. The door is opened by a vehicle impact and it closes automatically through the special hinge design. This Door can effectively reduce the leakage of cold air, realizing the energy conservation and reducing the energy cost.

尺寸范围 Size range	门最大宽度: 3000 室内 Max.Width: 3000 Indoor 门最大高度: 3500 室内 Max.Height:3500 Indoor
适用范围 Scope of application	室内 Indoor
门体厚度 Curtain thickness	7mm
门板颜色 Door panel color	全透明、双色 transparent, two color
工作温度 Working temperature	-25℃ ~ 5℃

GCD100 气门帘

GCD100 Air Curtain

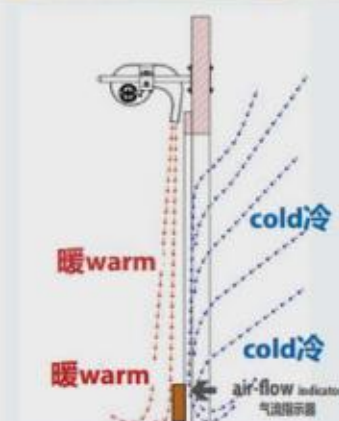

冷热气体运动图

GCD100- 气门帘

GCD100- Air Curtain


气帘门安装在墙壁温暖的一侧的门洞上方，当打开门时，气帘门系统会自动开启。它立即形成一种特殊的气流，在门洞的前面形成一个无形的门。这就是为什么冷空气不能再从冷藏室逸出，暖气不能进入的原因。

An air curtain is mounted above the door opening at the warm side of the wall. When opening the door, an air curtain system immediately switches on automatically. It instantly forms a special air flow, which creates an invisible door in front of the door opening. This is why cold air can no longer escape out of the freezer room and warm air cannot enter.

尺寸范围 Size range	门最大宽度: 4000 室内 Max.Width: 4000 Indoor 门最大高度: 4000 室内 Max.Height: 4000 Indoor
适用范围 Scope of application	室内 Indoor
工作电压 Working voltage	380V
电机功率 Motor power	1.5Kw
工作温度 Working temperature	0℃ ~ 45℃

GCD200 空气门

GCD200 Air Door

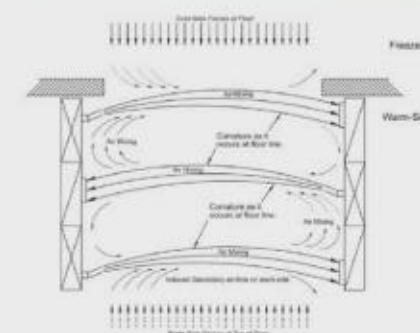

气体运动图

GCD200- 空气门

GCD200- Air Door

GCD200 空气门适合大型高频进出的冷库门洞，当打开门时，空气门系统会自动开启。它立即形成一种特殊的气墙，在门洞的前面形成一个无形的门。冷空气不能从冷库逸出，暖气不能进入冷库。进入冷库区域不受任何阻挡，安全高效。

GCD200 air door is suitable for large-size cold storage door opening with high frequent entrance and exit. When opening the door, the air door system immediately switches on automatically. It instantly forms a special air flow, which creates an invisible door in front of the door opening. This is why cold air can no longer escape out of the freezer room and warm air cannot enter. And the access to the cold storage area is without any obstruction, safe and efficient.

尺寸范围 Size range	门最大宽度: 5500 室内 Max.Width: 5500 Indoor 门最大高度: 5500 室内 Max.Height: 5500 Indoor
适用范围 Scope of application	室内 Indoor
工作电压 Working voltage	380V
电机功率 Motor power	0.75Kw
工作温度 Working temperature	-10℃ ~ 45℃

GRD100- 抗风杆快速门 >>>

GRD100- Fast roll door



GRD100- 抗风杆快速门 GRD100- Fast roll door

GRD100 是一款非常经济实用的快速门，通过可更换的门帘结构，使您的维修成本降低。

GRD100 is a very economical and practical fast door. Replaceable door curtain structure reduce the cost of your maintenance.

门轨材质 Door Rail Material

- 钢质表面喷涂
Steel with surface painting
- 镀锌钢板 Galvanized steel plate
- 铝合金 Aluminium alloy
- 不锈钢 Stainless steel
- 铝制抗风杆 Aluminium anti-wind bar

尺寸范围 Size range	门最大宽度: 4500 室内 Max.Width: 4500 Indoor 门最大高度: 5400 室内 Max.Height: 5400 Indoor
适用范围 Scope of application	室内 Indoor
速度 Speed: Opening	开启 1.0m/s 关闭 0.8m/s 1.0m/s, Closing 0.8m/s
工作电压 Working voltage	220V/380V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area< 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area> 13 m ²)
门帘厚度 Curtain thickness	1.0mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance	选配 optional

GM300- 自修复快速门 >>>

GM300-self- repairing fast door



GM300 自修复快速门 GM300-Self-Repairing Fast Door

GM300 是一款用于频繁使用的工作环境。门帘柔软而富有弹性，整个门帘没有任何负重及硬质材料，确保在紧急情况下对操作员与货物进行彻底的保护。当门受到撞击后，该门配置脱轨自动修复系统，无需任何手动复原。可使门的停工时间和维修成本降到最低。

GM300 fast door is suitable for the work environment which need frequent use. The curtain is soft and flexible and the door curtain is free of any load-bearing and rigid materials, ensuring the protection of the operator and cargo in emergency situations. When the door get impacted, the door's Automatic derailment repair system will work, do not need any manual reset, Minimizing downtime and maintenance costs for doors.

尺寸范围 Size range	门最大宽度: 4000 室外 Max.Width: 4000 outdoor 门最大高度: 4500 室外 Max.Height: 4500 outdoor
适用范围 Scope of application	室外 outdoor
速度 Speed: Opening	开启 1.5~2.0m/s 关闭 1.0m/s opening 1.5- 2.0 m/s closing 1.0m/s
工作电压 Working voltage	220V
电机功率 Motor power	0.75Kw (门帘面积小于 13 m ²) 0.75Kw (Door curtain area< 13 m ²) 1.5 Kw (门帘面积大于 13 m ²) 1.5 Kw (Door curtain area> 13 m ²)
门帘厚度 Curtain thickness	1.2mm
视窗厚度 Window thickness	1.5mm
手动装置 Manual Appliance 自修复功能 Self-repair function	选配 optional

GOD40 洁净平开门 >>>

GOD40 Clean Swing Doors



GOD40- 洁净平开门

GOD40- Clean Swing Doors

洁净平开门广泛应用于食品加工、制药、电子等行业。

洁净平开门具有安全、轻巧、免动力、无噪音、安装简便、耐腐蚀、使用寿命长等特点。

GOD40 Clean Swing door are widely used in food processing, pharmaceutical, electronics and other industries.

GOD40 clean swing door has the characteristics of safety, light weight, no power, no noise, easy installation, corrosion resistance and long service life.

尺寸范围 Size range	门最大宽度: 1500 室内 Max.Width: 1500 Indoor 门最大高度: 2300 室内 Max.Height: 2300 Indoor
适用范围 Scope of application	室内 Indoor
门体厚度 Scope of application	40~75mm
工作温度 Working temperature	0℃ ~ 30℃

柔性隔断 >>>

Separation flex doors



柔性隔断

Separation flex doors

柔性隔断适用于温差较大的内部隔断,例如用于分拣区或水果预冷区域隔断。门扇由 PVC 组成,门体宽度没有限制。由于所用材料的水蒸气渗透性,凝结问题被限制在最低限度,同时,由于完全没有热桥,达到了最大的绝缘值。因此降低了运营成本,提升了工作效率。

Separation Flex doors are suitable for internal partition with relatively high temperature differences, e.g. sorting area or fruit precooling area partition. Door leaf consists of PVC and there is no limit to the width that can be supplied. Condensation problems are limited to a minimum due to the water vapour permeability of the materials used, while at the same time, the maximum insulation value is achieved because of the complete absence of thermal bridges. Thus reducing operating costs & improving work efficiency

尺寸范围 Size range	门最大宽度: ∞ 室内 Max.Width: ∞ Indoor 门最大高度: 18000 室内 Max.Height: 18000 Indoor
适用范围 Scope of application	室内 Indoor
工作温度 Working temperature	-35℃ ~ 30℃
工作电压 Working voltage	380V